

Aluminum Adapters

Female to Female




Proudly made in the U.S.A.

75% More Aluminum



Leading Brand


FireHoseDirect.com

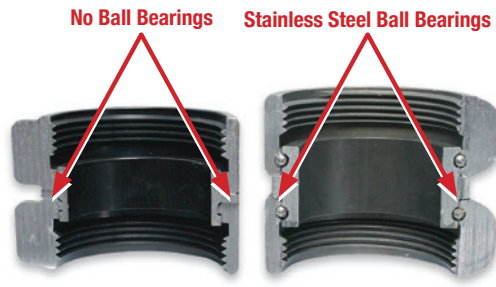

Leading Brand

FireHoseDirect.com


(Only 2 1/2" and up have bearings)



Swivel

Features

- Proudly made in the U.S.A.
- Lifetime warranty
- Lead free
- Heavy-duty
- All aluminum components are hard coat anodized per MIL-A-8625 Type III, Class 1
- Adapter components are made from seamless aluminum, alloy 6061-T6
- Hard coated anodized finish
- Resists corrosion, adbrasion and reduces electrolysis
- No Plastic Bearings
- Includes EPDM Gaskets on NH, NPSH and GHT
- Maximum Working Pressure - 300 psi
- Adapters will withstand a hydrostatic test of 1000 psi
- Adapters under 2 1/2" are piston ring style

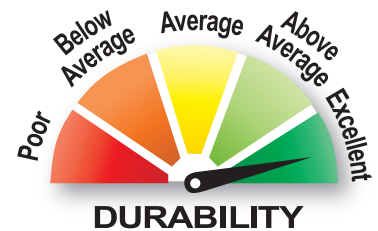

Threads conform to the following specifications, including a blunt start first thread known as the Higbee located in line with the Higbee indicator on the lug.

- Federal Handbook, USDA, NFPA and UL



Fire Department



Industrial

Hose Threads

Garden Hose Thread (GHT)

- The female threads will only connect to a male GHT.
- The male threads will only connect to a female GHT.
- It WILL NOT connect to 3/4" NPT or NPSH threads.
- GHT fittings seal with included gasket.

Fire Hose Thread (NH / NST)

- National Hose also known as National Standard Thread.
- The female threads will only connect to a male NH.
- The male threads will only connect to a female NH.
- NH is the most common thread in the fire service.
- NH fittings seal with included gasket.

Pipe Thread (NPT)

- National Pipe Tapered
- The female threads will only connect to a male NPT.
- The male threads will only connect to a female NPT or NPSH.
- An NPT to NPT connect requires thread compound to seal.
- A male NPT to female NPSH seals with included gasket.

Straight Hose Thread (NPSH)

- National Pipe Straight Hose
- The female threads will only connect to a male NPT or NPSH.
- The male threads will only connect to a female NPSH.
- A male NPSH WILL NOT thread into a female NPT.

The Safe Water Drinking Act section 1417 requires "Lead Free" products to be a minimum of 99.75% lead free.