

Double Jacket Industrial Hose




| Size | Service Test | Proof Test | Burst Test | Weight Per Foot Uncoupled | Width Laying Flat | Bowl Size |
|--------|--------------|------------|------------|---------------------------|-------------------|-----------|
| 1" | 400 psi | 800 psi | 1200 psi | .13 lbs | 1 7/8" | 1 3/8" |
| 1 1/2" | 400 psi | 800 psi | 1200 psi | .26 lbs | 2 3/4" | 1 15/16" |
| 2" | 400 psi | 800 psi | 1200 psi | .33 lbs | 3" | 2 2/5" |
| 2 1/2" | 400 psi | 800 psi | 1200 psi | .47 lbs | 4 3/8" | 3" |
| 3" | 400 psi | 800 psi | 1200 psi | .58 lbs | 5" | 3 17/32" |
| 4" | 300 psi | 600 psi | 900 psi | .77 lbs | 6 5/8" | 4 17/32" |
| 5" | 300 psi | 600 psi | 900 psi | .92 lbs | 8 5/16" | 5 1/2" |

| Size | Gallons Per Minute | Friction Loss Per 50 Foot | Average Coefficient of Flow |
|--------|--------------------|---------------------------|-----------------------------|
| 1 1/2" | 150 | 7.5 | 4.5 |
| 2" | 185 | 15 | 8.5 |

Features

- Proudly made in the U.S.A.
- 5 Year warranty
- Every hose is tested
- Mildew resistant
- Brass couplings available upon request





Test Ratings

(Water Only With Expansion Ring Couplings)

- Service Pressure
(A 3-minute hydrostatic test conducted by users on in-service hose to determine suitability for continued service)
- Proof Test Pressure *(A pressure equal to a least two times the service test pressure)*
- PSI Burst Test Pressure



Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with expansion ring couplings installed. Internal temperature of water not to exceed 103° F.

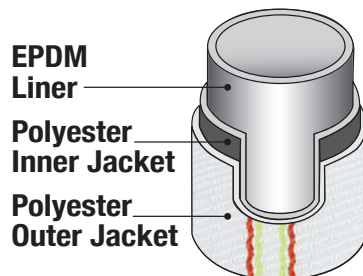

Made in the U.S.A.



Medium & Heavy Industrial



Underwriter Laboratories

Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to 5 years. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.