



# Clear PVC Suction Hose

## NH/NST Threads

Size	Outside Diameter	Working Pressure	Vacuum Rating in/Hg	Weight Per Foot
2 1/2"	3 1/2"	25 psi	29 psi	1.0
3"	3 1/2"	25 psi	29 psi	1.0
4"	4 1/2"	20 psi	28 psi	1.52
4 1/2"	5 3/4"	20 psi	28 psi	2.50
5"	5 3/4"	20 psi	28 psi	2.50
6"	6 3/4"	20 psi	28 psi	3.10

### Features

- Proudly made in the U.S.A.
- 1 Year warranty
- Couplings are Aircraft grade 6061-T6 seamless extrusions
- Couplings – Field repairable
- 3 Rocker lugs on 2 1/2" – 3"
- 4 Rocker lugs on 4" – 6"
- Working outside temperature - (22° F to 140° F)
- Hose color - Black and clear
- Corrugated exterior for superior flexibility
- Smooth bore for unrestricted flow
- Lightweight and flexible in cold weather
- Clear sidewall permits visual check
- Highly resistant to ozone, salt water, and ultraviolet light
- Custom length hose are available

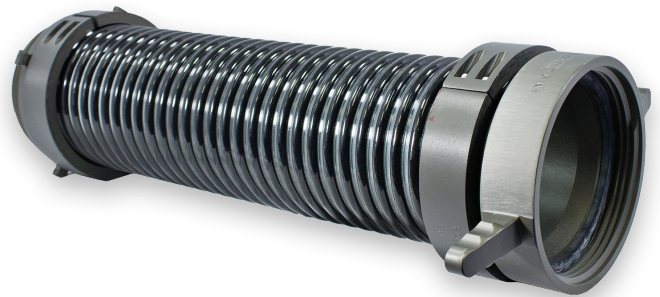

**Note – 2 1/2" Hose uses 3" Coupling and 4 1/2" Hose uses 5" Coupling**

**Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with expansion ring couplings installed. Internal temperature of water not to exceed 103° F. Not intended for hydrant pressure or head pressure from an above ground holding tanks. Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure.**



Made in  
the U.S.A.



Fire  
Department



Industrial



Agricultural



Residential

**Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to one year. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.**