

Rubber Covered Hose

Size	Service Test	Proof Test	Burst Test	Weight Per Foot Uncoupled	Width Laying Flat	Bowl Size
1"	300 psi	600 psi	900 psi	.17 lbs	1.56"	1 3/16"
1 1/2"	300 psi	600 psi	900 psi	.3 lbs	2.43"	1 13/16"
1 3/4"	300 psi	600 psi	900 psi	.32 lbs	2.81"	1 15/16"
2"	300 psi	600 psi	900 psi	.35 lbs	3.25"	2 1/4"
2 1/2"	300 psi	600 psi	900 psi	.49 lbs	4.06"	2 13/16"
3"	300 psi	600 psi	900 psi	.66 lbs	4.75"	3 5/16"

Features

- 10 Year warranty
- Raised thick rib construction
- Every hose is tested before shipment
- Meets and exceeds all NFPA 1961 standards
- Couplings - NH / NST or NPSH (Aluminum)
- Chemical resistant
- Nitrile/PVC Through-The-Weave
- Rubber lining is a single-ply synthetic polyester yarn
- Maintenance free




Test Ratings (Water Only With Expansion Ring Couplings)

- Service Pressure
(A 3-minute hydrostatic test conducted by users on in-service hose to determine suitability for continued service)
- Proof Test Pressure *(A pressure equal to a least two times the service test pressure)*
- PSI Burst Test Pressure




Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with expansion ring couplings installed. Internal temperature of water not to exceed 103° F.

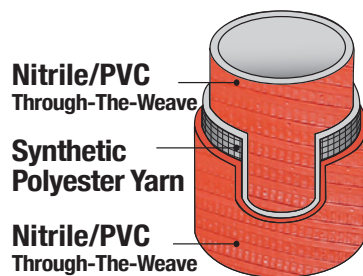

Red



Yellow

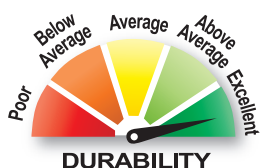

Fire Department



Heavy Industrial



Attack Hose



Underwriter Laboratories

Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to ten years. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.