

# Single Jacket Hose



Size	Service Test	Proof Test	Burst Test	Weight Per Foot Uncoupled	Width Laying Flat	Bowl Size
1 1/2"	300 psi	600 psi	900 psi	.15 lbs	2 7/16"	1 3/4"
2 1/2"	300 psi	600 psi	900 psi	.33 lbs	3 3/16"	2 3/4"
3"	300 psi	600 psi	900 psi	.38 lbs	4 15/16"	3 3/8"

## Features

- Proudly made in the U.S.A. (Hose and Couplings)
- In Service for over 30 years
- 1 Year Warranty
- Every hose is tested before shipment
- Meets and exceeds all NFPA 1961 standards
- Couplings - NH / NST or NPSH (Aluminum or Brass)
- Mildew resistant
- Polyester single jacket
- Rubber lining is a single-ply extruded tube of synthetic EPDM
- Adding color impregnation improves durability compared to untreated white hose





## Test Ratings (Water Only With Expansion Ring Couplings)

- Service Pressure (A 3-minute hydrostatic test conducted by users on in-service hose to determine suitability for continued service)
- Proof Test Pressure (A pressure equal to a least two times the service test pressure)
- PSI Burst Test Pressure



**Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with expansion ring couplings installed. Internal temperature of water not to exceed 103° F.**

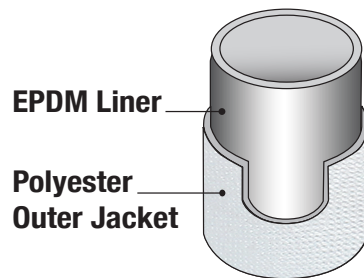

Made in the U.S.A.



Medium Industrial



Underwriter Laboratories

Colors available



White



Red



Yellow



Blue



Black

**Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to 5 years. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.**