

Double Jacket Hose with Storz Couplings

Municipal Fire Hose

Size	Service Test	Proof Test	Burst Test	Weight Per Foot Uncoupled	Width Laying Flat	Bowl Size
1 1/2"	400 psi	800 psi	1200 psi	.31 lbs	2 3/4"	1 15/16"
2 1/2"	400 psi	800 psi	1200 psi	.52 lbs	4 3/8"	3"
3"	400 psi	800 psi	1200 psi	.67 lbs	5 1/4"	3 1/2"

Features

- Proudly made in the U.S.A. (Hose and Couplings)
- 10 Year warranty
- "On The Job" for over 30 years
- Meets and exceeds all NFPA 1961 standards
- Couplings - Aluminum storz (Non-Locking)
- Mildew resistant
- Polyester double jacket
- Rubber lining is a single-ply extruded tube of synthetic EPDM
- Adding color impregnation improves durability compared to untreated white hose





Test Ratings (Water Only With Expansion Ring Couplings)

- Service Pressure
(A 3-minute hydrostatic test conducted by users on in-service hose to determine suitability for continued service)
- Proof Test Pressure *(A pressure equal to a least two times the service test pressure)*
- PSI Burst Test Pressure



Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with expansion ring couplings installed. Internal temperature of water not to exceed 103° F.

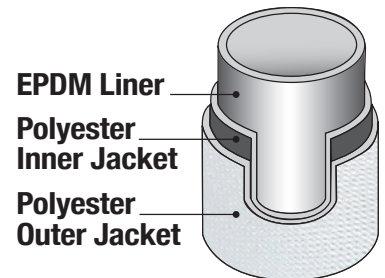

Made in the U.S.A.



Fire Department



Heavy Industrial



Attack Hose



Underwriter Laboratories

NFPA colors available



White



Red



Yellow



Blue



Green



Orange



Black



Tan

Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to ten years. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.