

Durance Double Jacket Fire Hose

When failure is NOT an option


**Municipal
Fire Hose**

Size	Service Test	Proof Test	Burst Test	Weight Per Foot Uncoupled	Width Laying Flat	Bowl Size
1 1/2"	400 psi	800 psi	1200 psi	.31 lbs	2 3/4"	1 15/16"
1 3/4"	400 psi	800 psi	1200 psi	.34 lbs	3"	2 1/8"
2 1/2"	400 psi	800 psi	1200 psi	.52 lbs	4 3/8"	3"
3"	400 psi	800 psi	1200 psi	.67 lbs	5 1/4"	3 1/2"

Size	Gallons Per Minute	Friction Loss Per 50 Foot	Average Coefficient of Flow
1 1/2"	150	17.5	9.5
1 3/4"	185	16.5	9

Features

- Proudly made in the U.S.A. (Hose and Couplings)
- 10 Year warranty
- "On The Job" for over 30 years
- Mildew resistant
- Polyester double jacket
- Every hose is tested before shipment
- Meets and exceeds all NFPA 1961 standards
- Couplings - NH / NST or NPSH (Aluminum or Brass)
- Rubber lining is a single-ply extruded tube of synthetic EPDM
- Adding color impregnation improves durability compared to untreated white hose


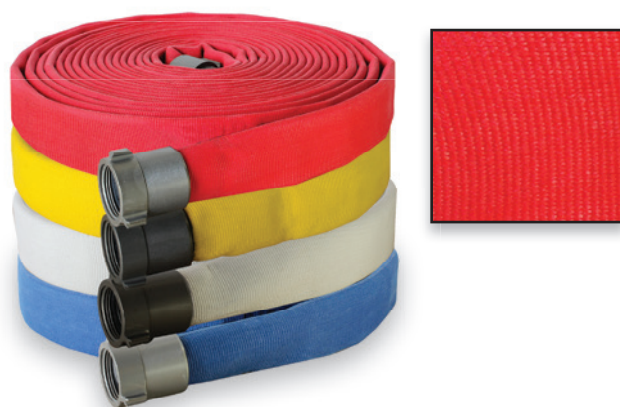


Test Ratings (Water Only With Expansion Ring Couplings)

- Service Pressure (A 3-minute hydrostatic test conducted by users on in-service hose to determine suitability for continued service)
- Proof Test Pressure (A pressure equal to at least two times the service test pressure)
- PSI Burst Test Pressure



Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with expansion ring couplings installed. Internal temperature of water not to exceed 103° F.

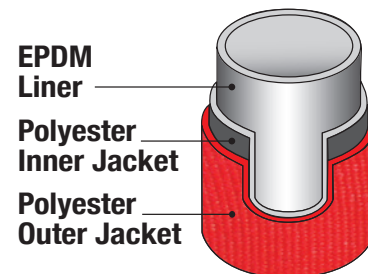

NFPA colors available



Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to ten years. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.