

# Large Diameter Supply Hose

# Municipal Fire Hose

Size	Service Test	Proof Test	Burst Test	Weight Per Foot Uncoupled	Width Laying Flat	Bowl Size
4"	250 psi	500 psi	750 psi	.74 lbs	6 3/4"	4 1/4"
5"	225 psi	450 psi	675 psi	.93 lbs	7 3/4"	5 1/4"

## Features

- 10 Year warranty
- Assembled in U.S.A.
- Heat resistant
- Chemical resistant
- Available in 25, 50, 100 Feet
- Couplings - Locking aluminum storz
- Nitrile / PVC Through-The-Weave
- NFPA compliant supply hose
- Maintenance free
- Every hose is tested
- Thin rib construction to aid abrasion resistance





## Test Ratings (Water Only With Expansion Ring Couplings)

- Service Pressure  
*(A 3-minute hydrostatic test conducted by users on in-service hose to determine suitability for continued service)*
- Proof Test Pressure *(A pressure equal to a least two times the service test pressure)*
- PSI Burst Test Pressure



**Warning - Hose is not rated for air or any other liquids. Test ratings are for water use only with Storz couplings installed. Internal temperature of water not to exceed 103° F.**

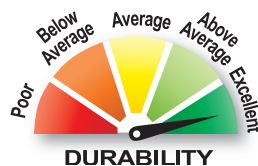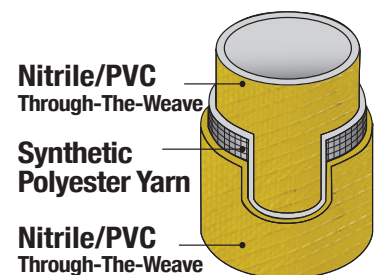

Fire Department



Supply



Power Plant



Heavy Industrial



Underwriter Laboratories



Red



Yellow

**Any hose found to be defective due to materials and / or workmanship shall be replaced at no charge up to ten years. In general, hose warranties cover manufacturing defects leading to hose failure. Wear through and abuse are not covered by warranty.**